

50m - 1.400kg


45m - 1.600kg

40m - 1.800kg

35m - 2.000kg



31m - 2.300kg

26m - 2.800kg

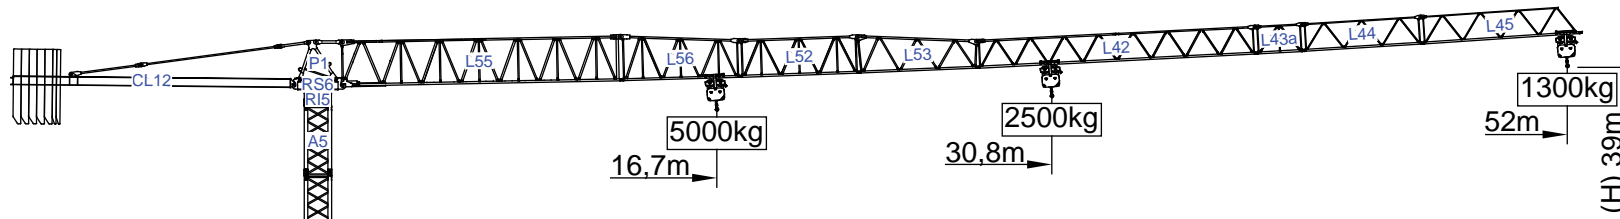

Cargas.Loads.Lasten.Charges.Cargas.Carichi.Yükler. ГРУЗОПОДЪЕМНОСТЬ

Icon	Jib Configuration	Hook Capacity (kg)	Hook Height (m)	Tower Height (m)								
				16	21	26	31	35	40	45	50	52
12000 kg 5x2000 + 2x1000 kg	52m L55+L56+L52+L53+L42 L43a+L44+L45	5000	30,8 m	2500	2500	2500	2480	2150	1820	1570	1370	1300
		2500	16,7 m	5000	3880	3050	2480	2150	1820	1570	1370	1300
11000 kg 5x2000 + 1x1000 kg	50m L55+L56+L52+L53+L42 L44+L45	5000	31,0 m	2500	2500	2500	2500	2190	1860	1600	1400	
		2500	16,9 m	5000	3950	3100	2530	2190	1860	1600	1400	
9000 kg 4x2000 + 1x1000 kg	45m L55+L56+L53+L42 L44+L45	5000	31,2 m	2500	2500	2500	2500	2180	1850	1600		
		2500	16,9 m	5000	3940	3090	2520	2180	1850	1600		
8000 kg 3x2000 + 2x1000 kg	40m L55+L56+L53+L42+L45	5000	30,5 m	2500	2500	2500	2450	2120	1800			
		2500	16,5 m	5000	3830	3010	2450	2120	1800			
7000 kg 3x2000 + 1x1000 kg	35m L55+L56+L52+L53 L43a+L45	5000	29,0 m	2500	2500	2500	2310	2000				
		2500	15,7 m	4900	3630	2840	2310	2000				
7000 kg 3x2000 + 1x1000 kg	31m L55+L56+L52+L53+L44	5000	28,9 m	2500	2500	2500	2300					
		2500	15,6 m	4870	3610	2820	2300					
6000 kg 2x2000 + 2x1000 kg	26m L55+L56+L52+L53	5000	26,0 m	2500	2500	2500						
		2500	15,5 m	4830	3570	2800						

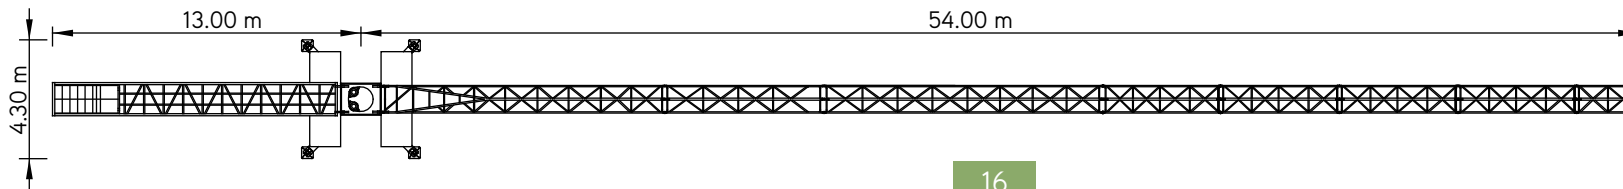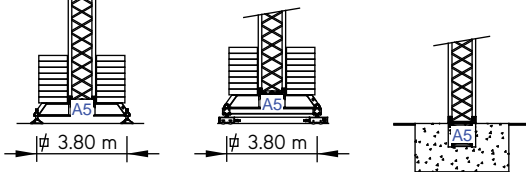









SGT 5213TL


52m - 1.300kg

5.000Kg

Características . Characteristics . Eigenschaften
Caractéristiques . Caratteristiche . Caratteristiche
Özellikler . ХАРАКТЕРИСТИКИ


	
	0 a 1 r.p.m. 2x4 daN.m
	0 a 60 m/min 3 kW
	15 m/min 2x3 kW

	
	0 a 76 m/min 0 a 38 m/min
	15 kW

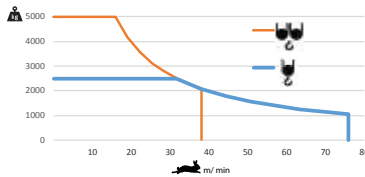










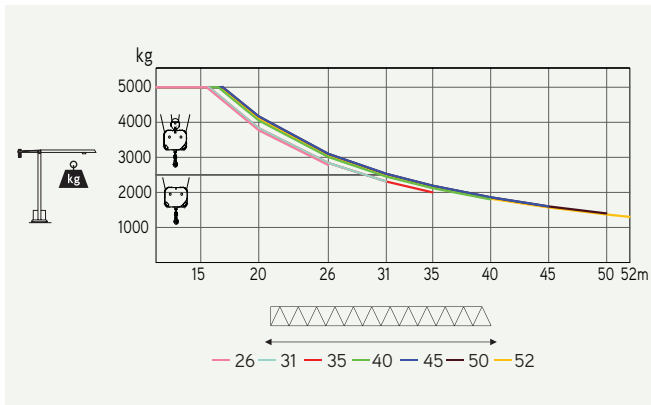










	30 kVA
	400 V +- 5% (50 Hz)

Velocidade de elevação . Hoisting speed . Hubgeschwindigkeit . Vitesse d'élevation .
Velocidad de elevación . Velocità di sollevamento . Kaldırma hızı (m/min) .
Скорость подъема (м/мин)



Elementos . Parts . Teile . Éléments . Elementos . Elemento . Parçalar . ЭЛЕМЕНТЫ

		A (mm)	B (mm)	C (mm)	kg	Code	
L55		11950	1210	2600	3100	509 52 13	
L56		5200	1160	1930	590		
L52		5200	1160	1650	535		
L53		5200	1160	1650	510		
L42		11820	1160	1210	820		
L43a		2100	1160	1210	120		
L44		5100	1160	1210	230		
L45		8600	1160	1210	290		
RS6 RI5		2250	1350	2050	2640		
P1		1660	1220	1720	720		
CL12		12000	1380	560	2560		
CP3		1160	165	3140	2x1000 2000		704 10 00
CP2		1160	330	3140	5x2000 10000		704 20 00
					TOTAL		24125
A5		11985	1160	1160	3080	530 12 00	
A5		6075	1160	1160	1660	530 06 00	
A5		3120	1160	1160	990	530 06 01	
A5		3120	1385	1385	1040	530 06 03	
A5		1275	1160	1160	450	530 06 02	
A5		5530	500	750	1250	630 00 01	
		2270	360	750	2x635 1270		
					TOTAL	2520	